



photo resistor placed in base to sense ambient light and movement

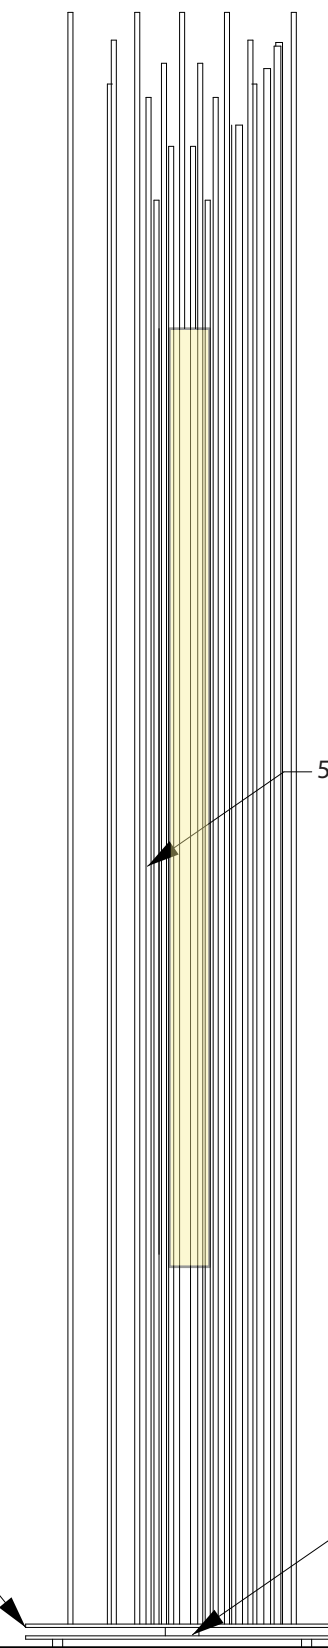


5' steel rods

medium density

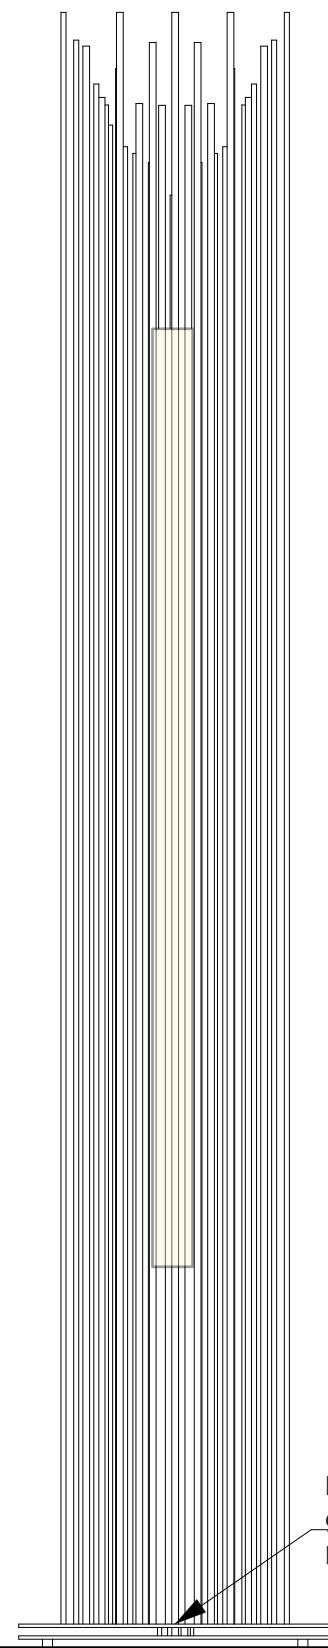


ball bearings and gears inbetween plates

high density
1'-0"

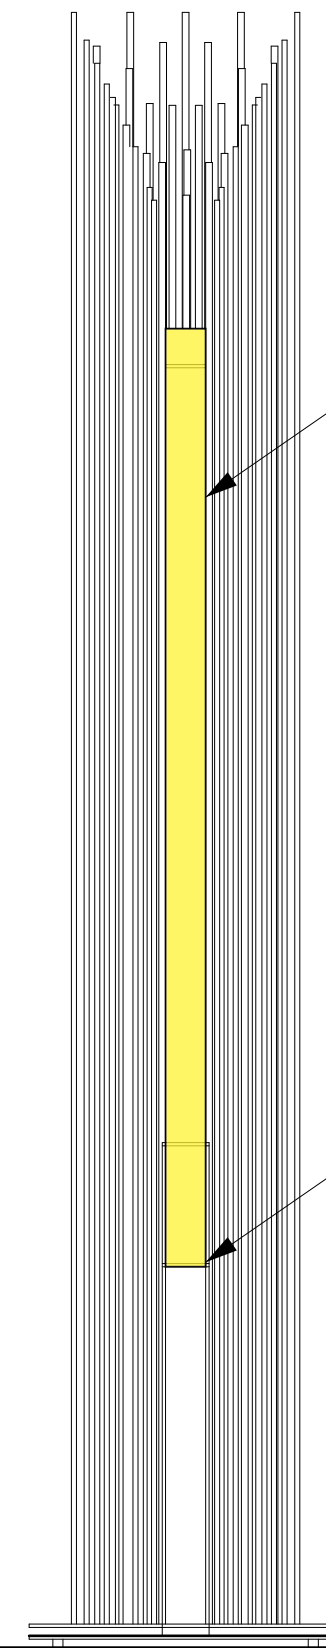

metal dille's

low density

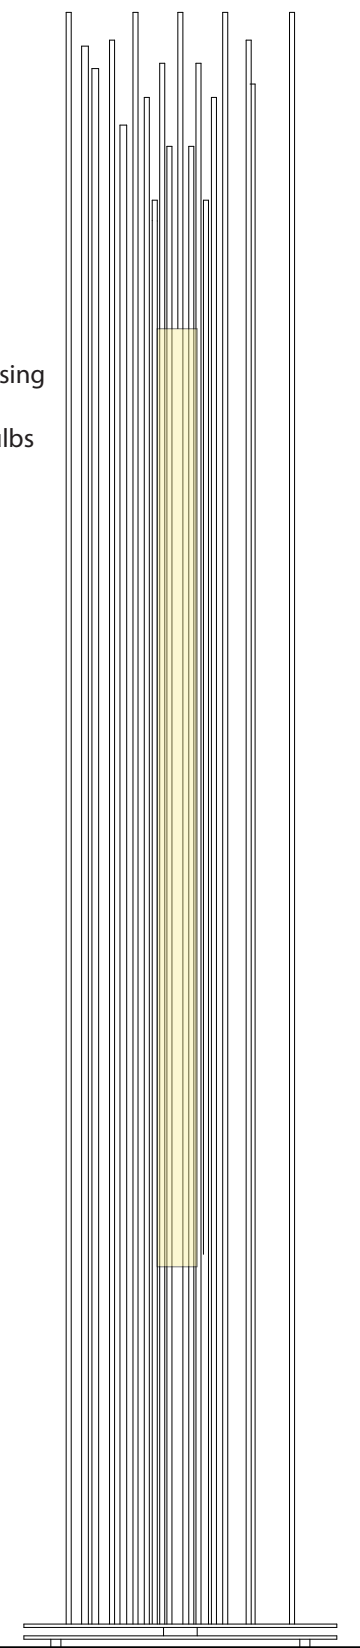

medium density

3' tall metal casing for ballast and flourescent bulbs

5'-0"